


OIL RESISTANT AIR HOSE

IDEAL FOR AIR APPLICATIONS THAT COME IN CONTACT INTERNALLY & EXTERNALLY WITH OIL AND OTHER PETROLEUM DERIVED FLUIDS



- NBR (Nitrile Based Compound) Tube Center
- Spiral Polyester Reinforced
- Hypalon™ Cover Compound
- Temperature Range: -40°F to 257°F (-40°C to 125°C)
- SAE J1532
- Available in 1/2" I.D. Only
- Ideal for Cylinder Air Oiler Hose
- *Not for Air Brake Hose Application*

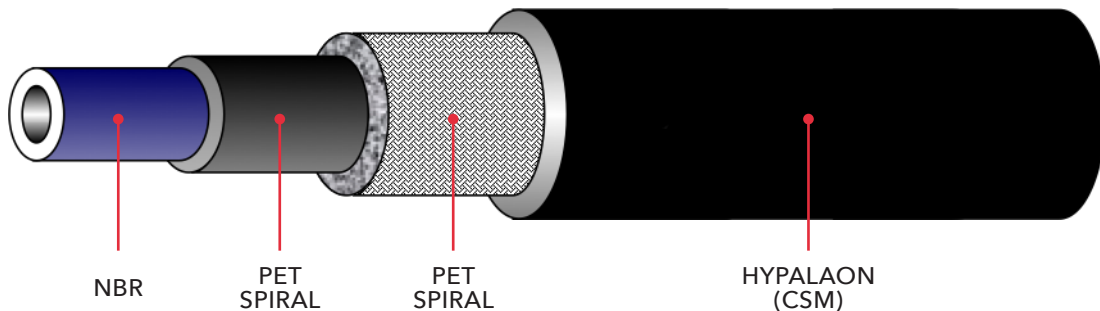

SIZE	INSIDE DIAMETER		OUTSIDE DIAMETER		WEIGHT		MIN BURST			
	INCH	MM	INCH	MM	LB/FT	KG/M	PSI	MPA		
1/2	0.476	0.524	12.10	13.30	0.850	0.898	0.25	0.38	1000	6.9

Contact Your Tramec Sloan Representative For More Information