



# SONOGRIP®

## PATENTED 7-WAY CABLE PLUGS WITH STANDARD & HEAVY DUTY CABLES

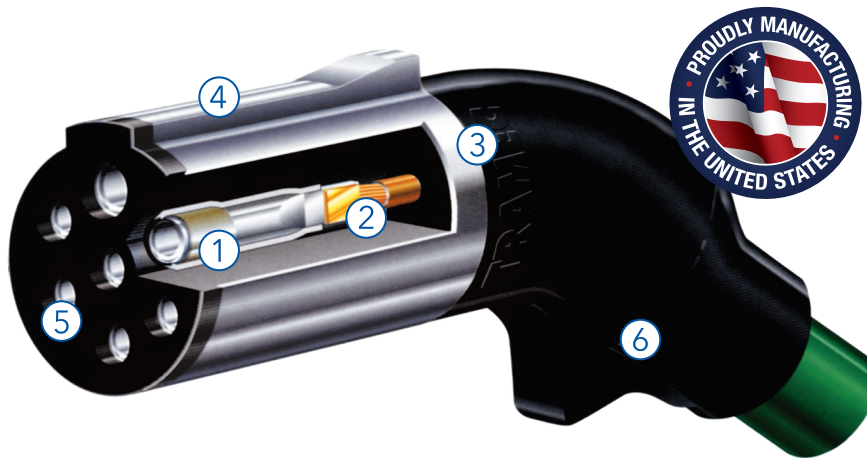

### STRAIGHT & ANGLED PLUGS

All styles of SONOGRIP® cables are available with one straight and one angled plug to reduce cable stress at the high-mounted receptacle, or with straight plugs at both ends.

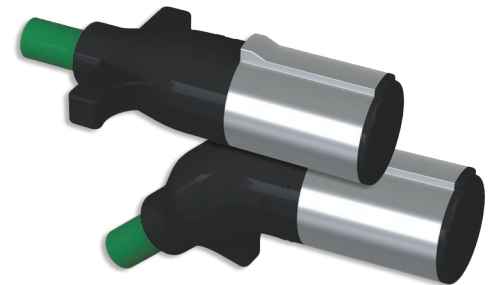

### EXCLUSIVE SONOGRIP® FEATURES & BENEFITS

1. Stainless steel radial springs and split terminals provide the best long-term connection to receptacle pins.
2. UltraSONIC welding of terminals eliminates corrosion and loosening at the terminal-to-wire connection.
3. Solid molded elastomeric body and sealants exclude moisture.
4. Reinforced nylon or optional die-cast sleeve provides durability.
5. Post-plated terminals for maximum corrosion protection.
6. Optional "Pistol Grip" angled plug offers strain relief to the cable resulting in longer lasting cables.
7. Optional XT Jacket providing superior cut, tear, and abrasion resistance.
8. Meets SAE J560 & J2222.
9. Features a 3-Year Warranty.



### STANDARD & XT JACKETS

Our **standard** jacketed cable provides good cut, tear, and abrasion resistance at an economical price. Provides good coil memory retention and coil remains flexible at sub-zero temperatures, down to -60°F.

Our **heavy duty urethane XT** jacketed cable provides superior cut, tear, and abrasion resistance. Provides excellent coil memory retention, even at high temperatures, up to 190°F, and yet coils remain flexible at sub-zero temperatures, down to -60°F.

# SONOGRIP®



Coiled Cables with both Straight and Angled Plugs

Straight Cables with both Straight and Angled Plugs

## POPULAR SONOGRIP® PART NUMBERS

P/N	W. LENGTH	CABLE	LEADS	ENDS
4C015	15 ft.	Standard Green ABS Straight Cable	Two 12 in. Leads	Two Straight Ends
4D015	15 ft.	Standard Green ABS Coiled Cable	Two 12 in. Leads	Two Straight Ends
4D017	15 ft.	Standard Green ABS Coiled Cable	One 12 in. and One 48 in.	Two Straight Ends
4C115	15 ft.	Standard Green ABS Straight Cable	Two 12 in. Leads	One Angle, One Straight
4D115	15 ft.	Standard Green ABS Coiled Cable	Two 12 in. Leads	One Angle, One Straight

PLUG STYLE		DESCRIPTION				STANDARD CABLE			
Tractor End	Trailer End	<b>XT Cable</b> Coiled	<b>XT Cable</b> Straight	ABS Coiled	ABS Coiled	1/10-6/12 Coiled	1/10-6/12 Straight	1/12-6/14 Coiled	1/12-6/14 Straight
<b>ZINC</b>									
Straight	Straight	4A0XX	4B0XX	4D0XX	4C0XX	450XX	460XX	470XX	480XX
Straight	Angle	4A1XX	4B1XX	4D1XX	4C1XX	451XX	461XX	471XX	481XX
<b>NYLON</b>									
Straight	Straight	4ACXX	4BCXX	4DCXX	4CCXX	45CXX	46CXX	47CXX	48CXX
Straight	Angle	4ADXX	4BDXX	4DDXX	4CDXX	45DXX	46DXX	47DXX	48DXX

**NOTE:** Plugs are also available with spring guards if desired. A wide range of other options are available to meet OEM requirements.

## XX KEY TO PART NUMBERS

**Straight Cables:** Overall Working Length

**Coiled Cables:** Working Length and Lead Options

XX	DESCRIPTION
12	12' Working Length, Two Leads
13	12" Working Length, One 12" Lead & One 72" Lead
14	12" Working Length, One 12" Lead & One 48" Lead
15	15' Working Length, Two Leads
16	15" Working Length, One 12" Lead & One 72" Lead
16	15" Working Length, One 12" Lead & One 48" Lead

**NOTE:** For Other Sizes, Please Contact Your Tramec Sloan Representative



Tramec Sloan, LLC.  
TRAMECSLOAN.COM  
P: 800.336.7778  
F: 877.286.6515

LIT-FS-29 | V. 100115