


THE SONOGRIP®

OUR INNOVATIVE PLUG FEATURES NUMEROUS ANTI-CORROSION ATTRIBUTES FOR A SUPERIOR, LONGER-LASTING CABLE.

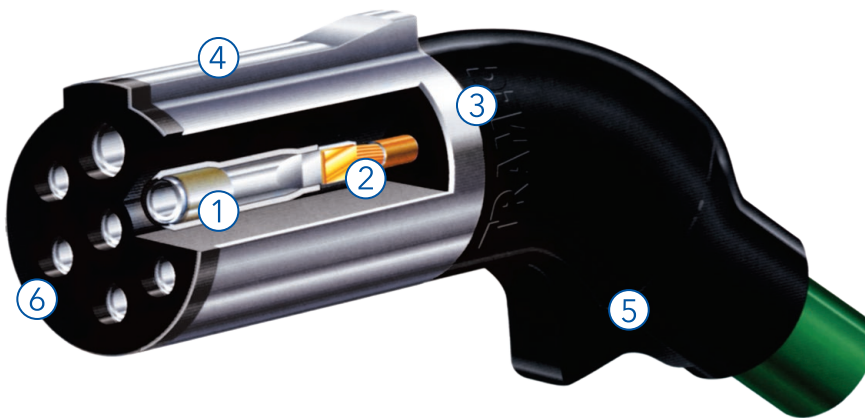

EXCLUSIVE SONOGRIP® FEATURES & BENEFITS

1. Stainless Steel Radial Springs and Split Terminals Provide the Best Long-Term Connection to Receptacle Pins
2. Terminals are **Ultrasonically Welded**, Eliminating Corrosion & Loosening at the Terminal-to-Wire Connection
3. Elastomeric Plug Body is **Solid-Molded** onto the Cable with Sealants to Exclude Moisture
4. Reinforced Nylon or Die-Cast Sleeve on Plug Provides Durability

5. REDUCES CABLE STRAIN!

The Sonogrip's unique angled plug end provides **strain relief** to the higher mounted plug.

This reduced stress results in longer lasting cables.



6. Post-Plated Terminals Utilized for Maximum Corrosion Protection
 - **Made in the USA!** Each Sonogrip is Made and Tested for Quality at Our Facility in Kansas
 - Meets SAE J560 & J2222
 - Temperature Rated from -60°F to 190°F
 - Features a 3-Year Warranty

STANDARD JACKET: Provides **Good** Cut, Tear & Abrasion Resistance. Plus, **Good** Coil Retention & Flexibility in Both Cold & Warm Weather Extremes.

HEAVY DUTY XT JACKET: Provides **Superior** Cut, Tear & Abrasion Resistance. Plus, **Excellent** Coil Retention & Flexibility in Both Cold & Warm Weather Extremes.



4A115: Coiled ABS Cable with XT Jacket, One Angled Plug, Zinc Sleeves, 15' with Two 12" Leads



4D017: Coiled ABS Cable with Standard Jacket, Two Straight Plugs, Zinc Sleeves, 15' with One 48" Lead



4CD12: Straight ABS Cable with Standard Jacket, One Angled Plug, Nylon Sleeves, 12' Length

THE SONOGRIP®

BUILD YOUR SONOGRIP® CABLE:

Use the tables below to choose the combination of features you need in your Sonogrip cable. Then complete your part number (XX) using the table to the right where you can choose the length and leads you need.

Don't see what you're looking for? We can make custom cables to your required specs. Just ask!



P/N: 45115

XX	WORKING LENGTH	LEADS*
10	10 ft.	Two 12"
12	12 ft.	Two 12"
13	12 ft.	One 12" / One 72"
14	12 ft.	One 12" / One 48"
15	15 ft.	Two 12"
16	15 ft.	One 12" / One 72"
17	15 ft.	One 12" / One 48"
20	20 ft.	Two 12"

*Lead Options are Applicable to Coiled Cables Only

SONOGRIP® ABS CABLES

P/N	CABLE STYLE	JACKET	TRACTOR PLUG	TRAILER PLUG	PLUG SLEEVE
4A0XX	Coiled	Heavy Duty XT	Straight	Straight	Zinc
4A1XX	Coiled	Heavy Duty XT	Straight	Angled	Zinc
4ACXX	Coiled	Heavy Duty XT	Straight	Straight	Nylon
4ADXX	Coiled	Heavy Duty XT	Straight	Angled	Nylon
4D0XX	Coiled	Standard (Green)	Straight	Straight	Zinc
4D1XX	Coiled	Standard (Green)	Straight	Angled	Zinc
4DCXX	Coiled	Standard (Green)	Straight	Straight	Nylon
4DDXX	Coiled	Standard (Green)	Straight	Angled	Nylon
4B0XX	Straight	Heavy Duty XT	Straight	Straight	Zinc
4B1XX	Straight	Heavy Duty XT	Straight	Angled	Zinc
4BCXX	Straight	Heavy Duty XT	Straight	Straight	Nylon
4BDXX	Straight	Heavy Duty XT	Straight	Angled	Nylon
4C0XX	Straight	Standard (Green)	Straight	Straight	Zinc
4C1XX	Straight	Standard (Green)	Straight	Angled	Zinc
4CCXX	Straight	Standard (Green)	Straight	Straight	Nylon
4CDXX	Straight	Standard (Green)	Straight	Angled	Nylon

STANDARD SONOGRIP® CABLES

P/N	CABLE STYLE	JACKET	WIRE	TRACTOR PLUG	TRAILER PLUG	SLEEVE
450XX	Coiled	Standard (Black)	1/10-6/12 GA	Straight	Straight	Zinc
451XX	Coiled	Standard (Black)	1/10-6/12 GA	Straight	Angled	Zinc
470XX	Coiled	Standard (Black)	1/12-6/14 GA	Straight	Straight	Zinc
471XX	Coiled	Standard (Black)	1/12-6/14 GA	Straight	Angled	Zinc
460XX	Straight	Standard (Black)	1/10-6/12 GA	Straight	Straight	Zinc
461XX	Straight	Standard (Black)	1/10-6/12 GA	Straight	Angled	Zinc
480XX	Straight	Standard (Black)	1/12-6/14 GA	Straight	Straight	Zinc
481XX	Straight	Standard (Black)	1/12-6/14 GA	Straight	Angled	Zinc